



# RA12-180B (12V180Ah)

RA series is a general purpose battery with 10 years design life in float service. It meets with IEC, JIS and BS standards. With up-dated AGM valve regulated technology and high purity raw materials, the RA series battery maintains high consistency for better performance and reliable standby service life. It is suitable for UPS/EPS, medical equipment, emergency light and security system applications.



## Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	180Ah@10hr-rate to 1.80V per cell @25°C
Weight	Approx.51.0 Kg (Tolerance± 1.5%)
Max. Discharge Current	1800A (5 sec)
Internal Resistance	Approx. 4mΩ
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ± 5°C
Float charging Voltage	13.6 to 13.8 VDC/unit Average at 25°C
Recommended Maximum Charging Current	54 A
Equalization and Cycle Service	14.6 to 14.8 VDC/unit Average at 25°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	Terminal F12/F16
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



MH28539



G4M20206-0910-E-16



CERTIFICATE

Postcode: 421001  
is in conformity with  
ISO 14001:2004 Standard






CERTIFICATE


Postcode: 421001  
is in conformity with  
OHSAS 18001:1999 Standard

## Dimensions


Unit: mm Dimension: 530(L)×209(W)×214(H)

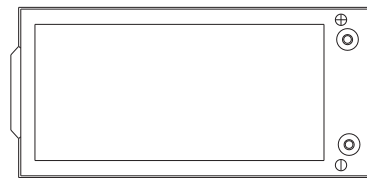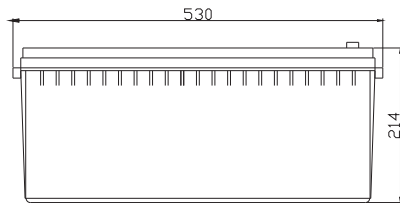

Terminal F12



Terminal F16



## Constant Current Discharge Characteristics: A (25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	499.4	377.0	291.6	173.6	112.4	69.37	47.14	38.01	31.55	20.78	18.73	9.916
10.0V	485.0	358.7	285.6	171.4	110.9	67.97	46.27	37.47	31.27	20.70	18.55	9.731
10.2V	470.6	346.0	281.1	168.8	109.8	67.25	45.86	37.10	31.07	20.51	18.36	9.546
10.5V	422.6	319.3	267.7	164.1	108.5	66.37	45.45	36.55	30.81	20.33	18.18	9.361
10.8V	381.4	291.2	246.7	158.7	106.9	65.83	44.92	35.30	30.66	20.25	18.01	9.266
11.1V	325.7	260.2	221.3	152.7	104.4	63.18	44.04	34.79	30.43	20.09	17.81	8.890


## Constant Power Discharge Characteristics: W(25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.6V	5166	4015	3208	1987	1302	812.9	555.0	455.0	378.0	248.9	224.6	119.4
10.0V	5064	3892	3156	1967	1290	803.0	546.7	448.6	374.6	247.9	222.8	117.4
10.2V	5006	3789	3121	1950	1282	797.2	544.3	444.4	372.3	246.0	220.9	115.2
10.5V	4557	3529	2977	1910	1274	787.1	539.9	438.4	369.4	244.0	218.7	113.0
10.8V	4151	3253	2751	1865	1258	781.3	533.8	423.6	367.7	242.9	216.5	111.9
11.1V	3646	2941	2477	1814	1239	752.0	524.9	417.5	366.3	241.2	214.2	107.9


All mentioned values are average values (Tolerance ±2%).




### Effect of temperature on long term float life

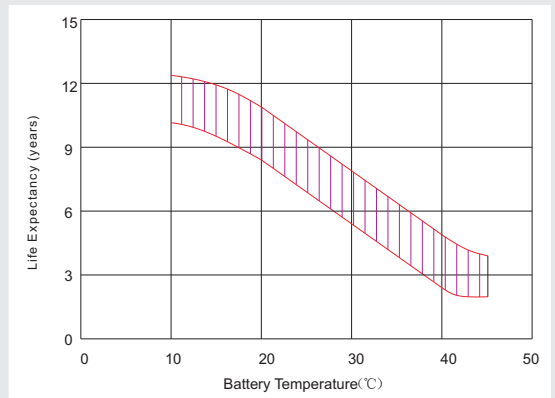


### Storage characteristic

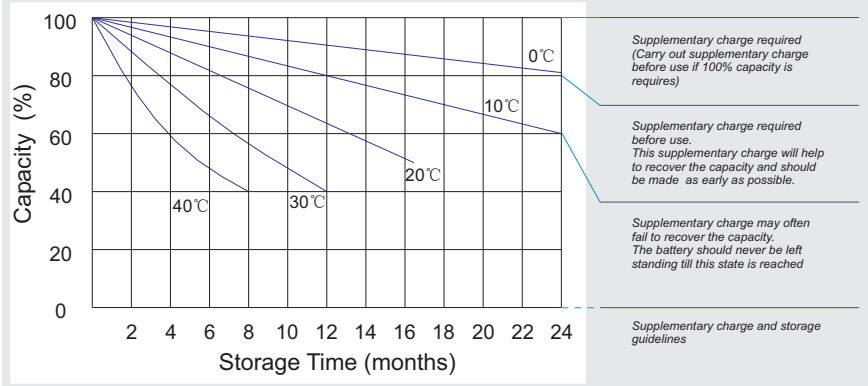

### Charge characteristic Curve for standby use

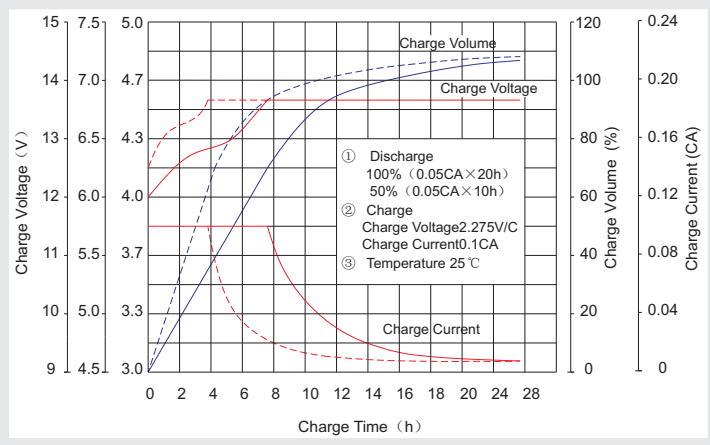

### Discharge characteristic Curve

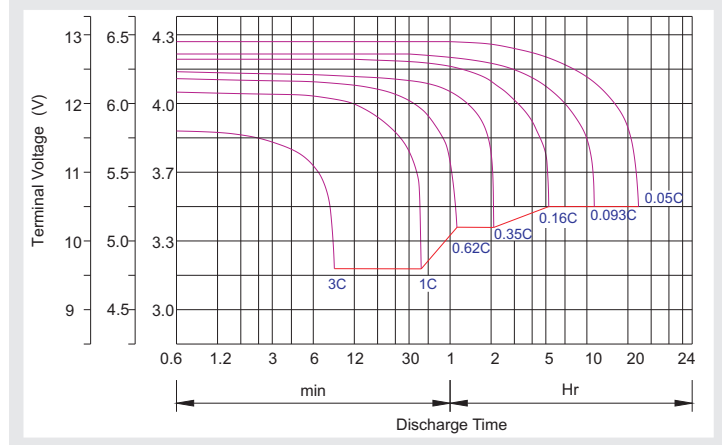

### Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

### Discharge Current VS. Discharge Voltage

Final Discharge Voltage V /cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

**Charge the batteries at least once every six months, if they are stored at 25°C.**

Charging Method:

Constant Voltage	-0.2Cx2h+2.4-2.45V/cellx24h, Max. Current 0.3C
Constant Current	-0.2Cx2h+0.1Cx12h
Fast	-0.2Cx2h+0.3Cx4h

Bolt	M5	M6	M8
Terminal	F3 F4 F13 F18 T25 T26	F8 F11 F12-1 F15	F5 F9 F10 F12 F14 F16
Torque	6~7N·m	8~10N·m	10~12N·m

### Maintenance & Cautions

#### Float Service:

- ※ Every month, recommend inspection every battery voltage.
- ※ Every three months, recommend equalization charge for one time.

#### Equalization charge method:

Discharge: 100% rate capacity discharge.

Charge: Max. current 0.3CA, constant voltage 2.4-2.45V/Cell charge 24h.

- ※ Effect of temperature on float charge voltage: -3mV/°C/Cell.

- ※ Length of service life will be directly affected by the number of discharge cycles, depth of discharge, ambient temperature and charging voltage.